


ストリッパ固定用ストレートパイロットパンチ (P-TiCN処理) (先端テーパタイプ)



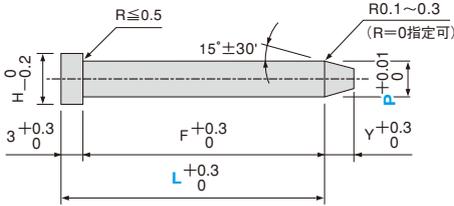

H-LC7H
材質 SKH51 **硬度** 61 ~ 64HRC ・ 表面 3000HV

H-LC7P
材質 粉末ハイス鋼 **硬度** 64 ~ 67HRC ・ 表面 3000HV

●規格仕様

| カタログ No. | | 指定 0.1mm 単位 | 指定 0.01mm 単位 | Y | H |
|--------------------|-----|-------------|---------------|---|----|
| 記号 | No. | L | min.P max. | | |
| H-LC7H (SKH51) | 3 | 10.0 ~ 40.0 | 2.00 ~ 3.00 | 2 | 5 |
| | 4 | | 3.00 ~ 4.00 | | 7 |
| | 5 | | 4.00 ~ 5.00 | 3 | 8 |
| | 6 | | 5.00 ~ 6.00 | | 9 |
| H-LC7P (粉末ハイス鋼) | 8 | | 6.00 ~ 8.00 | 5 | 11 |
| | 10 | | 8.00 ~ 10.00 | | 13 |
| | 13 | | 10.00 ~ 13.00 | 8 | 16 |
| | 16 | | 13.00 ~ 16.00 | | 19 |

●追加工

| 追加工 | 型式 | 先端テーパタイプ |
|---|-----|---|
|  | GC | 先端角度変更 $1.00 \leq P \leq 1.99 \rightarrow 5^\circ \leq GC < 10^\circ$ $2.00 \leq P \leq 5.99 \rightarrow 5^\circ \leq GC < 15^\circ$ ① P1.00~5.99に適用 ② No.3~No.6に適用 |
|  | YC | 先端テーパ長さ変更 $1 \leq YC \leq Y_{max}$ 指定0.1mm単位 |
|  | PKC | 先端径公差変更 $P +0.01 \rightarrow +0.005$ ① P寸法0.001mm単位指定可 ② P>13適用不可 |
|  | LKC | 全長公差変更 $L +0.3 \rightarrow +0.05$ |

| 追加工 | 型式 | 先端テーパタイプ |
|---|-----|--|
|  | KC | ツバ部廻り止め一面加工 |
|  | WKC | 廻り止め平行加工 (2面) |
|  | HC | ツバ径変更 $2.6 \leq P \leq HC < H$ 指定0.1mm単位 |
|  | TKC | ツバ厚公差変更 $T +0.3 \rightarrow +0.02$ $F +0.3 \rightarrow +0.1$ |
|  | TKM | ツバ厚公差変更 $T +0.3 \rightarrow 0$ $F +0.3 \rightarrow +0.1$ |
|  | FKC | F寸法公差変更 $F +0.3 \rightarrow +0.05$ |



Order 注文例

形式 No. **— 全長 — 先端寸法 — 追加工**

例 **H-LC7H6 — 18.3 — P5.37 —**

①: R = 0 のみ指定可。



Delivery 納期

6 日目着
(又は 6 日目発送)