


スクリュープラグ (標準タイプ)

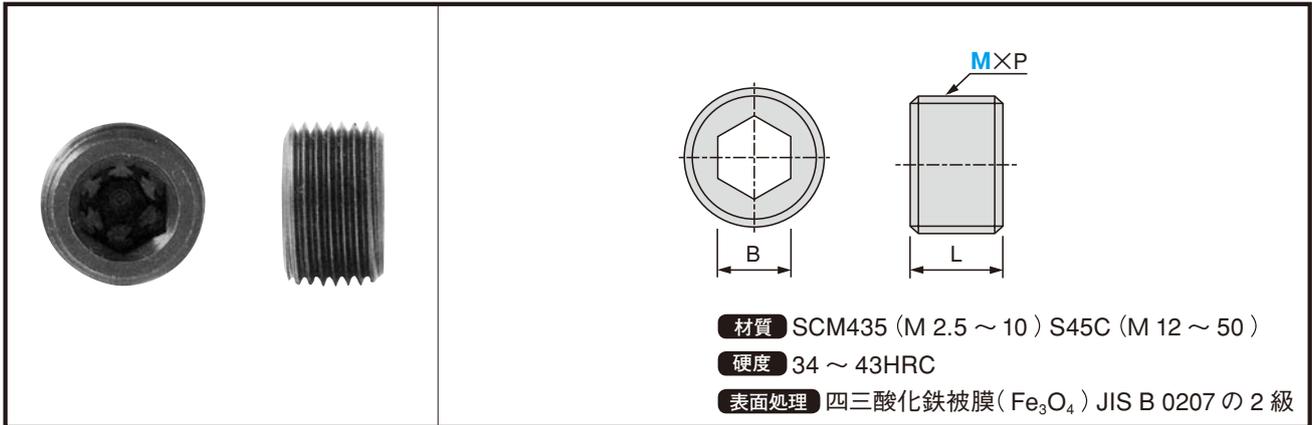

材質 SCM435 (M 2.5 ~ 10) S45C (M 12 ~ 50)

硬度 34 ~ 43HRC

表面処理 四三酸化鉄被膜 (Fe₃O₄) JIS B 0207 の 2 級

●規格仕様

カタログ No.				
記号	M	P	L	B
QW	2.5	0.45	3	1.3
	3	0.5	3	1.5
	4	0.7	4	2
	5	0.8	5	2.5
	6	1.0	6	3
	8	1.25	8	4
	10	1.5	10	5
	12			6
	14			8
	16			10
	18			12
	20		12	14
	22			17
	24			14
	25			17
	26			14
	27	18	17	
	28		17	
	30		17	
	32		14	
	33		17	
	34	14	14	
	36	18	17	17
	38			
	40			
42				
45				
50	25	19		

Order 注文例	形式
	例 QW20

Delivery 納期	2 日目着
	(又は 2 日目発送)

■スクリュープラグ (全長ショートタイプ)

●規格仕様

カタログ No.					
記号	M-L	P	L	B	
QWS	8-6	1.25	6	4	
	10-6			5	
	12-6			6	
	14-6			8	
	16-6			10	
	18-6		12		
	20-8		1.5	8	14
	22-8				17
	24-8				17
	25-8				14
	26-8	17			
	27-8	17			
	28-8	17			
	30-8	17			
	33-8	17			

Order 注文例	形式
	例 QWS20 - 8

Delivery 納期	2 日目着
	(又は 2 日目発送)